

Effect of Eccentricity on Annulus Pressure of Aerated Drilling

ZHANG Nan^{[a],*}; BI Xueliang^[a]; CHEN Xun^[a]; YU Xiaowen^[a]; LIU Shanshan^[a]

^[a] College of Petroleum Engineering, Northeast Petroleum University, Daqing, China.

* Corresponding author

Received 25 January 2015; accepted 11 March 2015
Published online 30 March 2015

Abstract

In the past two decades, aerated drilling has been applied to improving recovery of the low permeability oil and gas reservoirs at home and abroad. This technology can improve the level of exploration and development, reduce the cost of drilling and protect reservoir. Because of its advantages, aerated drilling has been developed and promoted rapidly. And its theoretical study has also been further developed. In this paper, the impact of the eccentric drill string to annular multiphase fluid in aerated drilling was studied. Based on mathematical solution of eccentric annuli, combined with multiphase flow control equations and flow law, aerated drilling eccentric annulus pressure formula was derived. Under the condition of Concentricity and different degrees of eccentricity, the eccentric annulus pressure were calculated. The distribution law of annulus pressure with depth and the influence law of the eccentricity to annulus pressure were analyzed.

Key words: Aerated drilling, Eccentric annuli; Annulus pressure

Zhang, N., Bi, X. L., Chen, X., Yu, X. W., & Liu, S. S. (2015). Effect of eccentricity on annulus pressure of aerated drilling. *Advances in Petroleum Exploration and Development*, 9(1), 74-78. Available from: URL: <http://www.cscanada.net/index.php/aped/article/view/6455>
DOI: <http://dx.doi.org/10.3968/6455>

INTRODUCTION

In order to effectively develop complex medium and small oil and gas field, fault-block oil-gas field, oil sheet, oilfield with low pressure and low permeability, heavy oil or super heavy oil field and old oilfield, well drilling technologies which include horizontal well and underbalanced drilling and so on successively appear in twentieth century 20 and 50, then the horizontal drilling well and underbalanced drilling technology rapidly develop and are extensively applied in the world^[1-5].

In 1996, assuming multiphase fluid can be seen as homogeneous mixture of three-phase of gas, liquid, solid, Guo et al established the calculation model for predicting the most optimal air injection rate and cuttings transport capacity.

In 1998, considering the existence of slippage, Bijleveld et al established steady flow model to calculate bottom-hole pressure and important parameters of two-phase flow during underbalanced drilling. The same year, Zhou Kaiji established steady state model of multiphase flow of underbalanced drilling through calculating continuity equation of gas, liquid phase, momentum equation and energy equation.

In 2000, combining experimental and theoretical study, Lage^[6-7] et al established mechanics model of concentric annulus of two-phase flow, the model includes the prediction method of flow pattern and the calculation formula of gas phase volume fraction and pressure drop of bubbly flow, dispersed bubble flow, slug flow, churn flow and annular flow.

In 2002, Perez-Tellez^[8-11] et al established pressure prediction model of comprehensive underbalanced drilling in the previous studies of underbalanced drilling model.

In summary, most of theoretical formula is based on pipe flow or concentric annulus flow, only a few formulas considered the effect of the eccentric drill pipe on annulus pressure.

1. AERATED DRILLING ECCENTRIC ANNULUS PRESSURE DROP CALCULATION DERIVATION

The basic hypothesis:

- External environment does not work on the multiphase flow control unit, multiphase flow control unit also does not work on external environment.
- Multiphase flow is under the state of steady flow.
- Ignore gas dissolved in the liquid phase and no chemical reaction and heat exchange between gas phase and liquid phase.
- Neglect the effect of thermal resistance on the annulus fluid temperature, and annulus multiphase fluid temperature is equal to the formation temperature.
- Without considering drill string rotation and fluid invasion, the mass force is only the gravity.

The angle between wellbore and horizontal direction is θ . According to the conservation of energy, for the unit mass of multiphase fluid, the differential expression of steady flow mechanical energy conservation equation can be expressed:

$$\frac{dp}{\rho} + g \cdot \sin \theta \cdot dz + v \cdot dv + dE = 0 \quad (1)$$

Under the condition of equal pressure drop, the pressure drop calculation formula of circular pipe flow and annulus flow, the concentric annulus diameter can be showed:

$$D_e = \sqrt{\frac{2}{3}}(D_2 - D_1) = 0.816497(D_2 - D_1) \quad (2)$$

Equation (2) can be expressed:

$$-\frac{dp}{dz} = \rho \frac{dE}{dz} + \rho g \sin \theta + \rho v \frac{dv}{dz} \quad (3)$$

By the circular pipe flow pressure drop and the definition of equivalent diameter, we can get the axial direction equivalent diameter of eccentric annulus:

$$D_e = \sqrt{\frac{2}{3}} K_a (D_2 - D_1) = 0.816497 \sqrt{K_a} (D_1 - D_2) \quad (4)$$

Equation (4) can be expressed:

$$-\frac{dp}{dz} = \left(\frac{\partial p}{\partial z} \right)_h + \left(\frac{\partial p}{\partial z} \right)_{fr} + \left(\frac{\partial p}{\partial z} \right)_a \quad (5)$$

According to Equation (5), gravity pressure drop gradient, frictional pressure drop gradient and acceleration

pressure drop gradient together form the total pressure drop gradient of annular multiphase.

(a) Gravity Pressure Drop Gradient

The pressure gradient caused by height variation:

$$\left(\frac{\partial p}{\partial z} \right)_h = \rho g \sin \theta \quad (6)$$

Where the multiphase fluid mixture density can be showed:

$$\rho = \rho_m H_l + \rho_g (1 - H_l) \quad (7)$$

Therefore, Equation (7) can be rewritten:

$$\left(\frac{\partial p}{\partial z} \right)_h = \rho g \sin \theta = [\rho_m H_l + \rho_g (1 - H_l)] g \sin \theta \quad (8)$$

(b) Frictional Pressure Drop Gradient

According to the definition, the friction pressure drop gradient can be written:

$$\left(\frac{\partial p}{\partial z} \right)_{fr} = \frac{\lambda v}{2D_e} \rho = \frac{\lambda (m/A) v}{2D_e} \quad (9)$$

(c) Acceleration Pressure Drop Gradient

Owing to

$$v = v_{sg} + v_{sm} = \frac{m_g}{\rho_g A} + \frac{m_m}{\rho_m A} \quad (10)$$

So the equation for acceleration pressure drop gradient can be showed:

$$\left(\frac{\partial p}{\partial z} \right)_a = \rho v g \frac{dv}{dz} = \rho v \left[\frac{d}{dz} \left(\frac{m_m/A}{\rho_m} \right) + \frac{d}{dz} \left(\frac{m_g/A}{\rho_g} \right) \right] \quad (11)$$

Compared with gas phase, multiphase fluid compressibility of liquid phase and solid phase can be ignored, we can obtain

$$\frac{d}{dz} \left(\frac{m_m/A}{\rho_m} \right) \ll \frac{d}{dz} \left(\frac{m_g/A}{\rho_g} \right), \text{ so}$$

$$\begin{aligned} \left(\frac{\partial p}{\partial z} \right)_a &= \rho v \frac{d}{dz} \left(\frac{m_g/A}{\rho_g} \right) = \rho v \left[\frac{\rho_g \frac{d}{dz} (m_g/A) - (m_g/A) \frac{d}{dz} \rho_g}{\rho_g^2} \right] \\ &= \rho v \left[\frac{\frac{d}{dz} (m_g/A)}{\rho_g} - \frac{(m_g/A) \frac{d}{dz} \rho_g}{\rho_g^2} \right] \end{aligned} \quad (12)$$

In addition, due to gas phase density changes in annulus is generally much greater than gas phase mass flow rate changes, the flowing equation can be obtained:

$$\frac{\frac{d}{dz} (m_g/A)}{\rho_g} \ll \frac{(m_g/A) \frac{d}{dz} \rho_g}{\rho_g^2} \quad (13)$$

Equation (12) can be simplified to

$$\left(\frac{\partial p}{\partial z}\right)_a = -\rho v \frac{(m_g/A)}{\rho_g^2} \frac{d\rho_g}{dz} \quad (14)$$

According to the gas state equation, we can know

$$\rho_g = \frac{p\overline{M}_g}{ZRT}$$

Where \overline{M}_g represents the molecular weight of injected gas, so

$$\frac{d\rho_g}{dz} = \frac{d}{dz} \left(\frac{p\overline{M}_g}{ZRT} \right) = \frac{\overline{M}_g}{ZRT} \frac{dp}{dz} + \frac{p}{ZRT} \frac{d\overline{M}_g}{dz} - \frac{p\overline{M}_g}{Z^2RT} \frac{dZ}{dz} - \frac{p\overline{M}_g}{ZRT^2} \frac{dT}{dz} \quad (15)$$

Simplifying Equation (15) by:

$$\frac{d\rho_g}{dz} = \rho_g \left(\frac{1}{p} \frac{dp}{dz} + \frac{1}{\overline{M}_g} \frac{d\overline{M}_g}{dz} - \frac{1}{Z} \frac{dZ}{dz} - \frac{1}{T} \frac{dT}{dz} \right) \quad (16)$$

We can assume $\frac{1}{\overline{M}_g} \frac{d\overline{M}_g}{dz} - \frac{1}{Z} \frac{dZ}{dz} - \frac{1}{T} \frac{dT}{dz} \ll \frac{1}{p} \frac{dp}{dz}$, so

simplifying Equation (16) we can obtain:

$$\frac{d\rho_g}{dz} = \frac{\rho_g}{p} \frac{dp}{dz} \quad (17)$$

Substituting Equation (17) into Equation (14), we can obtain

$$\begin{aligned} \left(\frac{\partial p}{\partial z}\right)_a &= -\rho v \frac{(m_g/A)}{\rho_g^2} \frac{d\rho_g}{dz} = -\rho v \frac{(m_g/A)}{\rho_g^2} \frac{\rho_g}{p} \frac{dp}{dz} \\ &= -\frac{\rho v v_{sg}}{p} \frac{dp}{dz} \end{aligned} \quad (18)$$

Finally, substituting Equation (8), Equation (9), Equation (18) into Equation (5), we can obtain

$$\frac{dp}{dz} = \frac{[\rho_m H_l + \rho_g (1 - H_l)] g \sin \theta + \lambda m v / (2D_e A)}{1 - \frac{[\rho_m H_l + \rho_g (1 - H_l)] v v_{sg}}{p}} \quad (19)$$

Where

$$a = [\rho_m H_l + \rho_g (1 - H_l)] g \sin \theta$$

$$b = \lambda m v / (2A),$$

$$c = [\rho_m H_l + \rho_g (1 - H_l)] v v_{sg}.$$

Substituting Equation (4) into Equation (19), multiphase flow pressure drop calculation formula of aerated drilling eccentric annular can be expressed:

$$\frac{dp}{dz} = \frac{a + b / (0.816497 \sqrt{K_a} (D_2 - D_1))}{1 - \frac{c}{p}} \quad (20)$$

Where

$$K_a = \frac{P_m(z_0)}{z_0^m} + \frac{2R_1}{R_1 + R_2} \left(\frac{P_m(z_0)}{z_0^m} - \frac{P_{m+1}(z_0)}{z_0^{m+1}} \right), z_0 = \frac{1}{\sqrt{1 - \varepsilon^2}}$$

2. ANNULAR PRESSURE CALCULATION AND ANALYSIS OF AERATED DRILLING IN ECCENTRIC ANNULUS

Based on the eccentric annulus pressure drop formula derived from above equations, C# language is used to compile calculation program of aerated drilling annulus pressure and calculate aerated drilling annulus pressure. Combining with calculation data to prepare graphs and analyze variation regularity of annulus pressure, then the effect of different eccentricity on the annulus pressure can be obtained.

The basic parameters: The well type is vertical well; The well depth is 3,350 m; The calculation step is 60 m.

Table1
Basic Parameters

Name	Data	Unit	Remark
Ground temperature	5	°C	
Geothermal gradient	3.5	°C/100 m	
Casing	222.4	mm	Inner diameter
Drill pipe	127	mm	Outer diameter
Drill collar	165	mm	Outer diameter
Liquid injection	0.6	m ³ /min	
Liquid density	1.05	g/cm ³	
Gas injection	40	m ³ /min	
Gas relative density	1.0		Air is 1.0
Cutting density	2.6	g/cm ³	
Cuttings sphericity	1		Sphericity is 1.0
Cutting size	4	mm	
Wellhead back pressure	0.1	MPa	

For the sake of simplifying calculation process, we ignore the joint and do not consider the presence of downhole motor. The following calculation analysis is taking the constant eccentricity in the whole well section as example.

2.1 Pressure Calculation Results

Table 2
Annulus Pressure Calculation Data (Eccentricity of 0.5,1.0 for Example)

Well depth m	Centricity MPa	Eccentricity is 0.5 MPa	Eccentricity is 1.0 MPa
0	0.20	0.20	0.20
240	1.01	0.96	0.86
480	2.02	1.93	1.74
720	3.24	3.10	2.83
960	4.63	4.44	4.09

To be continued

Continued

Well depth m	Centricity MPa	Eccentricity is 0.5 MPa	Eccentricity is 1.0 MPa
1,200	6.14	5.91	5.48
1,440	7.75	7.48	6.97
1,680	9.45	9.13	8.54
1,860	10.77	10.41	9.76
2,220	13.49	13.06	12.30
2,370	14.65	14.20	13.39
2,370	14.65	14.20	13.39
2,610	16.54	16.04	15.16
2,850	18.47	17.92	16.95
3,090	20.42	19.83	18.78
3,115	20.63	20.03	18.98
3,115	20.63	20.03	18.98
3,175	21.26	20.63	19.51
3,235	21.89	21.23	20.04
3,295	22.53	21.83	20.58
3,350	23.11	22.38	21.07

2.2 Regular Analysis

Table 3
Comparisons of Annulus Bottomhole Pressure Under Different Eccentricity

Eccentricity	Annulus bottomhole pressure MPa	Differential pressure compared with non eccentricity MPa
0	23.11	0
0.1	22.98	-0.13
0.2	22.80	-0.31
0.3	22.62	-0.49
0.4	22.38	-0.73
0.5	22.19	-0.41
0.6	21.92	-0.92
0.7	21.73	-1.38
0.8	21.48	-1.63
0.9	21.30	-1.81
1.0	21.07	-2.04

The eccentricity of 0, 0.5, 1.0 is taken as example, annulus pressure data under different eccentricity is drawn in the same figure.

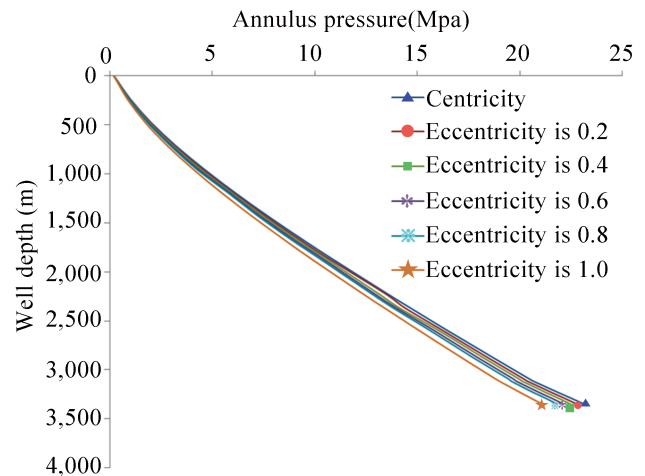


Figure 1
Annulus Pressure Under Different Eccentricity

As shown in Figure 1, change rule of annulus pressure is consistent under different eccentricity when other parameters are fixed. Iterative calculation program is based on annular wellhead back pressure which is the starting point, we calculate from the wellhead down, owing to the constant wellhead back pressure, annulus outlet pressure value is the same in Figure 2. The maximum annulus pressure appears under the condition of centricity, annulus pressure reduces after the emergence of eccentricity. The bigger eccentricity is, the smaller annulus pressure will be, the slope of curve increases, the annulus pressure curve is steeper, the annulus downhole pressure becomes lower. As shown in Figure 1, the downhole pressure decrease with increasing eccentricity, the bigger eccentricity is, the bigger increasing trend will be. Equivalent diameter of annulus is varied owing to the effect of eccentricity, this make the greater pressure than condition of centricity and can lead to friction pressure loss and pressure decreasing of annulus downhoe.

CONCLUSION

Aerated drilling annulus pressure follows curve distribution, pressure gradually decreases from the bottom to wellhead, the cross-sectional area changing position which includes casing shoe and junction of drill pipe does not show pressure mutation, this is because the gravitational pressure drop is dominant in the annulus drop, liquid is incompressible fluid. Although the variation of gas volume, gas density is very small in contrast with liquid density, aerated liquid density has little change in the position of area variation cross-section. In the same conditions, the eccentric annulus flow pressure drop is less than the concentric annulus, and the greater eccentricity is, the smaller flow pressure drop will be.

NOMENCLATURE

ρ_m Solid-liquid mixed density, $\rho_m = H_l[\rho_s\phi + \rho_l(1-\phi)]$, kg/m^3
 ϕ Volume ratio of solid phase particles in solid-liquid mixed phase
 ρ_g Density of gas phase
 θ The angle between borehole axis and horizontal direction
 λ Multiphase flow frictional resistance coefficient
 p Well section average pressure, MPa
 z Well depth, m
 A Annulus cross-section area, m^2
 D_e Annular equivalent diameter, m
 G Gravitational acceleration, m/s^2
 H_l Liquid holdup
 E_g Proximity
 m Multiphase flow mass flow rate, $m = m_g + m_l + m_s$, kg/s
 v Average velocity of multiphase fluid, m/s
 v_{sg} Superficial gas velocity, m/s
 D_1 The diameter of drill string, m
 D_2 The borehole diameter, m
 R_1 Radius of inner pipe (radius of drill string), m
 R_2 Radius of outer pipe (radius of borehole), m
 K_a Flow ratio

REFERENCES

- [1] Francis, P. A., Davidson, I. A., Harthi, S., Geldof, W., Culen, M. S., & Jenkins, T. (2003, February). *Low risk/high reward strategy drives underbalanced drilling impementation in PDO*. Paper presented at SPE/IADC Drilling Conference, Amsterdam, Netherlands.
- [2] Gas Technology Institute (GTI). (2001). *Underbalanced Completions: A Technology Review*. Chicago, USA: Gas Technology Institute.
- [3] Divine, R. (2003, March). *Planning is critical for underbalanced applications with under experienced operators*. Paper presented at IADC/SPE Underbalanced Technology Conference and Exhibition, Houston, Texas.
- [4] Hogg, T. W. (1997). *Colombian underbalanced drilling operations achieve breakthrough success*. Paper presented at IADC/SPE, Amsterdam, Netherlands.
- [5] Zhang, H. M., & Yang, H. (2004). *DNP-02 CBM well underbalanced horizontal multi-branchs wellbore drilling engineering technical proposal*. Beijing, China: Asian American Coal (China), Inc.
- [6] Lage, A. C. V. M., & Time, R. W. (1986). An experimental and theoretical investigation of upwrd tow- phase flow in Annuli. *SPE Journal*, 7(3), 325-336.
- [7] Lage, A. C. V. M., & Time, R. W. (2000). Mechanical model for upward tow-phase flow in Annuli. *SPE* 63127.
- [8] Brill, J. P., & Mukherjee, H. (1999). *Multiphase flow in wells*. USA: The Society of Petroleum Engineers Inc.
- [9] Taitel, Y., & Barnea, D. (1983). Counter gas-liquid vertical flow, model for flow pattern and pressure drop. *J. Multiphase Flow*, (9), 637-647.
- [10] Eaton, D. (1997). *Fracture gradien prediction for the new generation* [Online forum comment]. Retrieved from <http://business.highbeam.com/1886/article-1G1-20095161/fracture-gradient-prediction-new-generation>
- [11] Sunthanker, A. A., Kuru, E., & Miska, S. (2001). New development in aerated mud hydraulics for drilling in inclined well. *SPE Drilling & Completion*, 18(2), 152-158.